



KANDAVU




Material	steel pipes \varnothing 26 mm / steel profiles D35 \times 41 mm
Connection thread	2 \times G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	12, 15, 18



KANDAVU 1800 \times 670

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/535	35	17,2	10,2	1,276	1022	831	533	-	-	mc 50
1800/670	35	21,5	12,7	1,276	1280	1040	667	-	-	mc 50
1800/805	35	25,8	15,3	1,276	1538	1250	802	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
 Chrome surface treatment reduces heating capacity by ~30 %.
 Accessories (page 64, 65 and 66) is not part of the radiator.

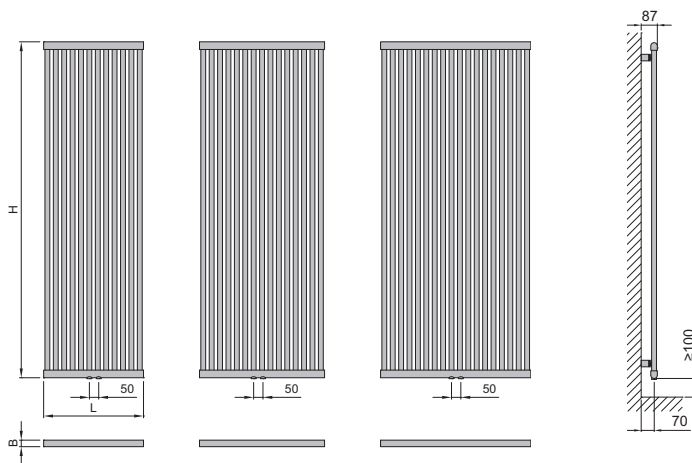

Connection options

DKAN 1800 0535...

DKAN 1800 0670...

DKAN 1800 0805...